


DIMENSIONS FOR INTEGRA CAMERA MOUNT FIT

(Dimensions shown are the same for Class 2A, 3A, 4A guards.)

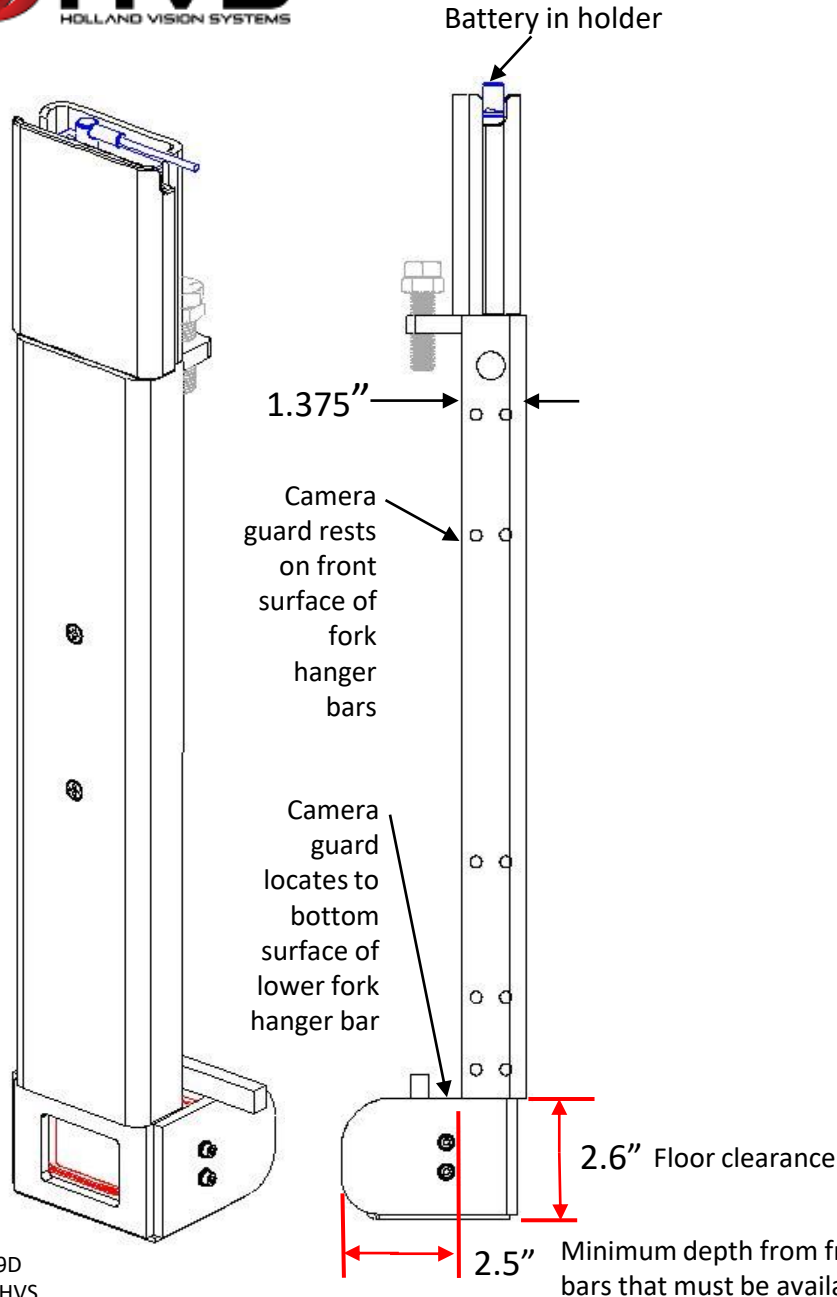

Installed Guard Example

Integra Camera Features

- Wireless camera system with rechargeable lithium battery powering camera. Run time of a single battery is approximately 100 hours with standard automatic shutoff sensor.
- The camera turns off automatically when the forks are lowered for driving or parking.
- All carriage-mounted components (camera, battery, antenna) are contained in the camera guard so they can be installed as a single bolt-on unit in approximately 30 minutes. No welding or additional bracketry is required for installation.
- Monitor can display a camera full-screen or two cameras in side-by-side split-screen. It can automatically switch to display a rear camera when the truck is shifted into reverse.
- Camera mount sizes are available for most trucks. Mounts for Class 2A, Class 3A and 4A carriages using ITA hook-on forks are available. Forks can be 1.5" thick or greater.
- Camera mount has heavy welded steel construction with baked-on powdercoat finish, weight is approximately 12#.
- The battery for the camera is located at the top of the camera guard for easy access for changing.
- Options available: Rear-view cameras, DC/DC converters for trucks with power supplies higher than 24VDC, camera with white LED lighting, on-board battery chargers, bare-bones model. NEW: Green line laser with camera in same mount