

Integrated Camera Mount


INTEGRA

This mount is a beefy steel weldment, powder-coated for durability. It attaches between the forks to provide the operator with a view in-line with the fork blades. The structure protects the camera and cable from impact damage and installs in seconds! A battery holder is integrated into the top of the guard so that all parts on the fork-carriage are installed at once. The automatic shutoff sensor turns the camera off while driving so batteries can last 100 hours before recharging! Designed for ITA hook-on forks. For trucks with hydraulic fork positioners or pin-mount forks, contact HVS for options.



Specifications

Construction	Steel Plate, Welded
Attachment	2 ea. 1/2"-13 Hex-Head Bolts
Size	Class 2 - 17.5L x 3.5W x 3D in. (445 x 89 x 76mm) Class 3 - 21.5L x 3.5W x 3D in. (546 x 89 x 76mm) Class 4 - 26.5L x 3.5W x 3D in. (673 x 89 x 76mm)
Weight	Class 2 - 9.5 lb. (4.3 kg) Class 3 - 11.5 lb. (5.3 kg) Class 4 - 13.5 lb. (6.2 kg)
Weather Resistant	Rust-Resistant Powder Coat Finish
Other	Integrated Battery Holder Automatic Shutoff White LED Lighting Optional Green-Line Laser Optional
Part Number	Class 2 - HVS8992 Class 3 - HVS8993 Class 4 - HVS8994

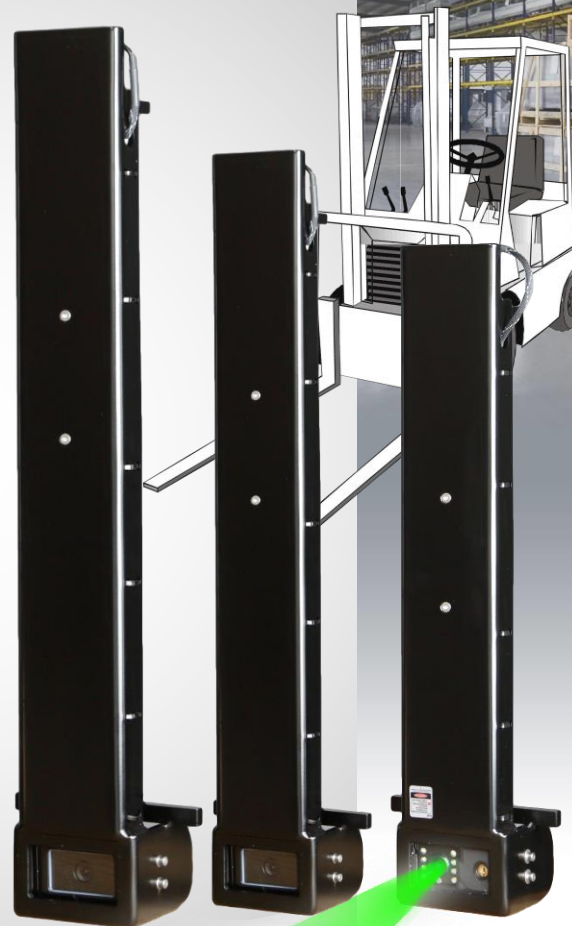

Screen Shots



Installation